




Directly Pairing with CCT Panel Controller

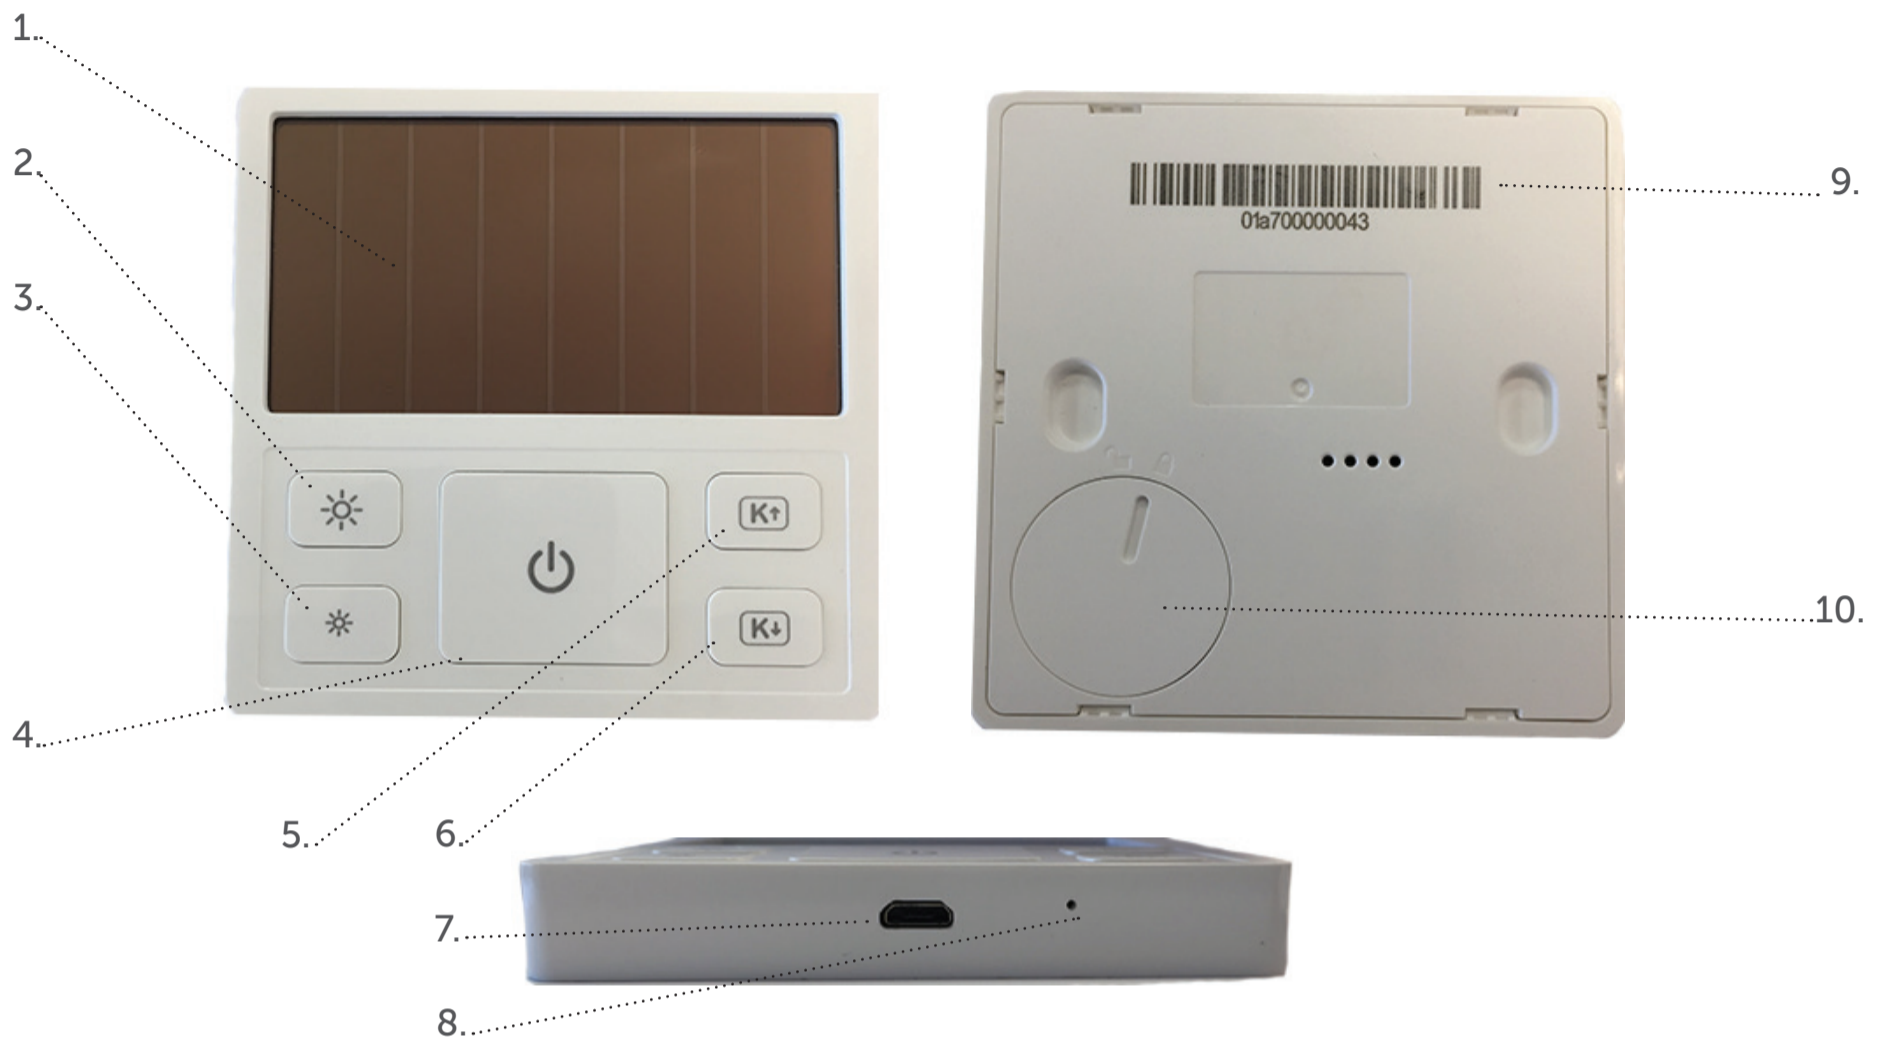

1. Solar Panel: automatically converting light to power
2. Dimming up button;
3. Dimming down button;
4. ON/OFF button
5. CCT value increased up button
6. CCT value decreased down button
7. USB interface for pairing and additional charging (charging time is 0.5-1 minutes)
8. Blue LED indicator
9. Blue tooth device serial number
10. Back up battery's installation socket

Pairing the controller with corresponding drivers:

Power on the drivers which need to be paired with the controller and within 10s after the lights are powered on, push on any button 2~6 3x times (interval time 1.5 Seconds) and then wait about 3 seconds, the lights will flash 3 times, this shows the pairing has been successful.

Cancelling the pairing of the controller and corresponding

Turn on the power of the corresponding drivers which need to be cancelled and within 10seconds after the luminaires light up, push on any control panel button 2~6 5x times (interval time of 1.5 Seconds) and then wait about 3seconds, the lights will flash 5 times, this shows the pairing is has been cancelled.

