



LUCESCO
light for life

Turin Series
SRR60W250WH

SHOP LIGHTS

Commercial/Retail/Hospitality

Applications

- Shopping malls
- Retail outlets
- Entry areas
- Supermarkets
- Food outlets

Description

- Aluminium and polycarbonate
- Hi-bright efficient design
- Adjustable
- Colour options available



product range

Code	SRR50W250WH	SRR60W250WH
Watts	50W	60W
Cutout	205mm	205mm
CRI	>80	>80
Efficiency	≥105lm/W	≥105lm/W



enquiries@lucesco.com.au | 08 8366 2294 | www.lucesco.com.au



LUCESCO
light for life

Turin Series
SRR60W250WH

SHOP LIGHTS

Quick Facts


Watts	60W
Power Factor	≥0.95
IP Rating	20
Dimming	Yes
Luminous Flux	6300lm
Color Temperature	4000K
Color Rendering Index(CRI)	>80
Beam Angle	73°
Fascia Colour	White
Installation	Recessed
Warranty	5 Years

Product Specifications


Supply Voltage	220-240VAC
Supply Frequency	50/60Hz
Cable	1.2M Flex&Plug
Body	Aluminium
Diffuser	PC
Driver	Remote
Ambient Temp	-15°C to +45°C
Avg. Lifetime	>50,000 hrs @ ta 25°C

Option

• CCT	3000K/4000K/5000K
• CRI	>70/>80/>90
• Color	White/Black/Silver
• Dimming	0~10V/Dali

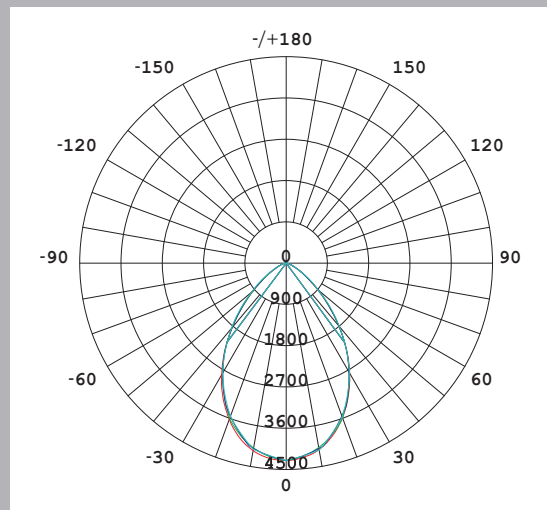

SRR60W250WH

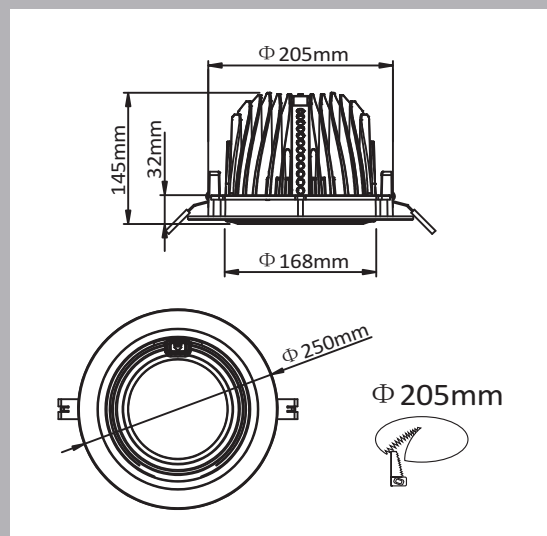

enquiries@lucesco.com.au | 08 8366 2294 | www.lucesco.com.au




LUCESCO
light for life

Turin Series
SRR60W250WH


SHOP LIGHTS

Photometric Diagram

SRR50W250WH

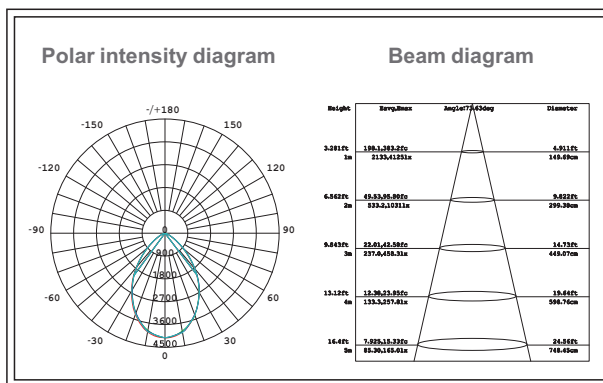

SRR60W250WH

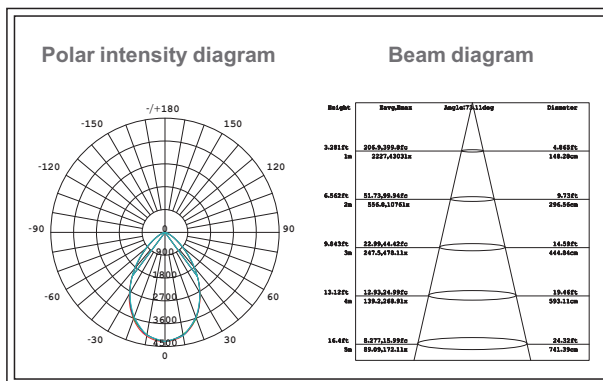



Product Information

Technical Specifications

Voltage	Power	Power Factor	Lumen	CCT	Beamangle	Lifespan	CRI	Dimmable
100-240VAC	50W	≥0.95	5250lm	4000K	73°	>50,000 hrs	≥80	No
100-240VAC	60W	≥0.95	6300lm	4000K	73°	>50,000 hrs	≥80	No

Driver Data Sheet

Driver Data	Dim	Non-Dim
Frequency	— —	47/63Hz
Input Voltage	— —	100-240VAC
Efficiency	— —	≥87%
Total Load Wattage	— —	75W
Power Factor	— —	≥0.95
Full Load Output Voltage	— —	27-72VDC
Rated Output Current	— —	1300mA
Power Tolerance	— —	— —
Current Output Tolerance	— —	±5%
Dimming Range	— —	No
Dimmer	— —	No
Short Circuit Protection	— —	PASS
THD	— —	18%
Withstand Voltage	— —	3.75KV

