



LUCESCO
light for life

Milan Series
LSR36W1147*90SL4K270

LINEAR RECESS/SUSPENDED

Commercial/Industrial/Office

Applications

- Indoor use only IP20
- Ceiling or wall mount
- Recessed/Flush finish
- 36W/54W/72W

Description

- Aluminium/Polycarbonate
- Easy installation
- Trunking system
- Wide beam angle
- High efficiency
- Black/White/Silver



Product Range

Code	LRS18W1147*90SL	LSR27W1707*90SL	LSR36W1147*90SL	LSR54W1707*90SL
Watts	36W	27W	36W	54W
Dimension	1147*90*100mm	1707*90*100mm	1147*90*100mm	1707*90*100mm
CRI	>80	>80	>80	>80
Efficiency	95lm/W	95lm/W	95lm/W	95lm/W



enquiries@lucesco.com.au | 08 8366 2294 | www.lucesco.com.au



LUCESCO
light for life

Milan Series
LSR36W1147*90SL4K270

LINEAR RECESS/SUSPENDED

Quick facts



Input power	36W
Power Factor	>0.9
IP Rating	54
Dimming	No
Luminous flux	3450lm
Color temperature	4000K
Color rendering index	>80
Beam Angle	270°
Fascia Colour	Silver
Installation	Surface mounted
Warranty	5 Years

Product Specifications

Supply Voltage	220-240VAC
Supply Frequency	50-60Hz
Cable	No
Body	Aluminium
Diffuser	PC
Driver	Tridonic
Ambient Temp	-20°C to +50°C
Avg. lifetime	>50,000 hrs @ ta 25°C

Option

CCT	3000K/4000K/6000K
CRI	80/>90
COLOUR	Black/White/Silver
FUNCTION	Dali/1~10V/Tuneable white

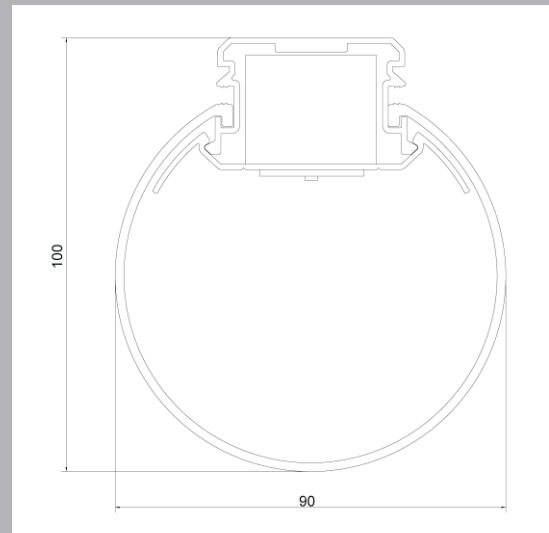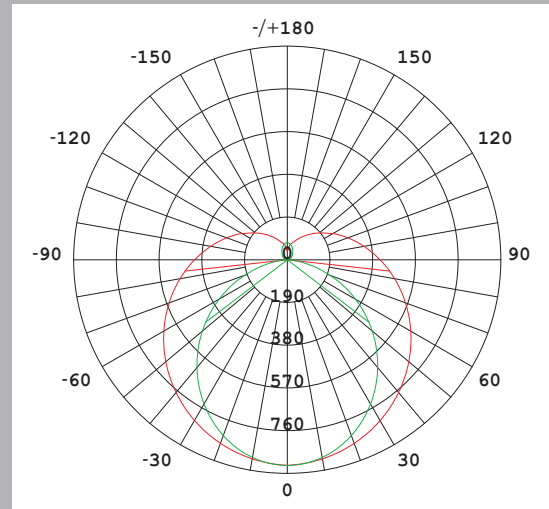

enquiries@lucesco.com.au | 08 8366 2294 | www.lucesco.com.au