




## Industrial/Commercial/Retail

### Applications

- Walkways
- Residential
- Industrial
- Back of house

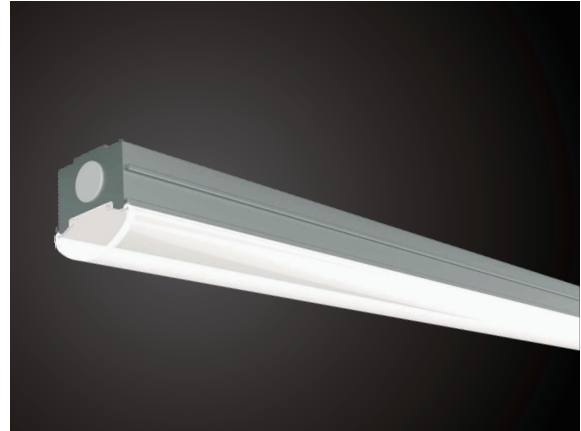

### Description

- High lumen efficiency
- Opal diffuser
- Surface mounted



### Product Range

<b>Code</b>	BLMO15W600*69WH	BLMO30W1200*69WH	BLMO40W1500*69WH
<b>Watts</b>	15W	30W	40W
<b>Dimension</b>	600mm*69mm	1250mm*69mm	1500mm*69mm
<b>CRI</b>	>80	>80	>80
<b>Efficiency</b>	120lm/W	120lm/W	120lm/W





**Quick Facts**

Watts	30W
Power Factor	≥0.96
IP Rating	20
Dimming	No
Luminous Flux	3600lm
Color Temperature	4000K
Color Rendering Index(CRI)	>80
Beam Angle	120°
Fascia Colour	White
Function	Emergency(4W-6W/3Hr)
Installation	Surface Mounted
Warranty	5 Years

**Product Specifications**

Supply Voltage	220-240VAC
Supply Frequency	50/60Hz
Cable	No
Body	Aluminium
Diffuser	PC
Driver	Fixed
Ambient Temp	-20°C to +40°C
Avg. Lifetime	>60,000 hrs @ ta 25°C

**Option**

- CCT 3000K/4000K/5000K/6500K
- CRI >80/>90
- Color White/Black/Silver

