




## Lucesco Smart Switch

- No wiring (to switch)
- No power supply required
- No battery
- ECO friendly
- No WiFi / Bluetooth / Zigbee
- Multi functional control
- 3 different controllers
  - 5A controller
  - 2x5A dual channel controller multiple switches
  - 10A controller




## Applications

- Areas that are difficult to wire
- Existing installation
- New installation
- Heritage buildings
- Remote switching (up to 150m outside/30m inside )
- 2 way or more switching application

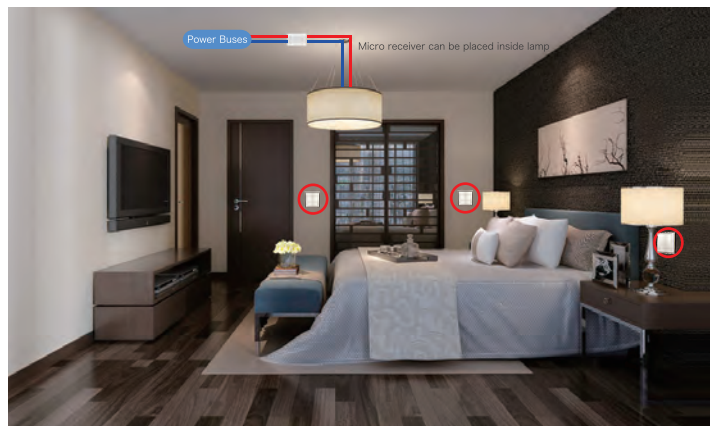

## Description

- Smart easy switch styles
- Ability to switch lights other application (up to 10 amps)
- Low maintenance
- Durable construction
- ECO friendly
- Easy to pair devices

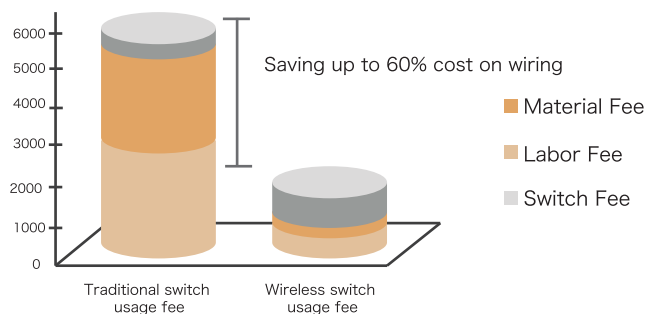

You actually save more money by using wireless kinetic switches.


Adopting wireless kinetic switch for light control over traditional wiring can save 60% on light installation cost





### LUC302 5A Receiving Controller

Operating Voltage: AC85V-260V 50/60HZ  
Control Way: One way  
Receiving Sensitivity: -110dB  
Storage Capacity: Can store 10 wireless switch information  
Control Component Type: Relay  
Rated Current: AC 5A  
Connection: Terminal  
Product Weight: 55g  
Working Temperature: -20°C to +50°C  
Working Life: 150000 times

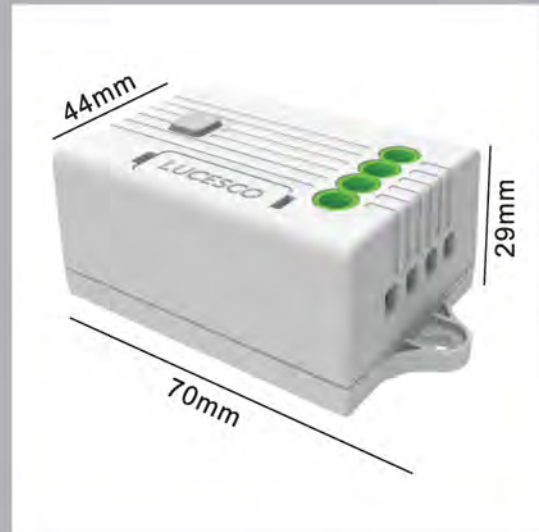


### LUC303 2x5A Receiving Controller

Operating Voltage: AC85V-260V 50/60HZ  
Control Way: Two way  
Receiving Sensitivity: -110dB  
Storage Capacity: can store 10 wireless switch information  
Control Component Type: Relay  
Rated Current: AC 2x5A  
Connection: Terminal  
Product Weight: 55g  
Working Temperature: -20°C to +50°C  
Working Life: 150000 times



### LUC304 10A Receiving Controller

Operating Voltage: AC85V-260V 50/60HZ  
Control Way: One way  
Receiving Sensitivity: -110dB  
Storage Capacity: can store 10 wireless switch information  
Control Component Type: Relay  
Rated Current: AC 10A  
Connection: Terminal  
Product Weight: 55g  
Working Temperature: -20°C to +50°C  
Working Life: 150000 times

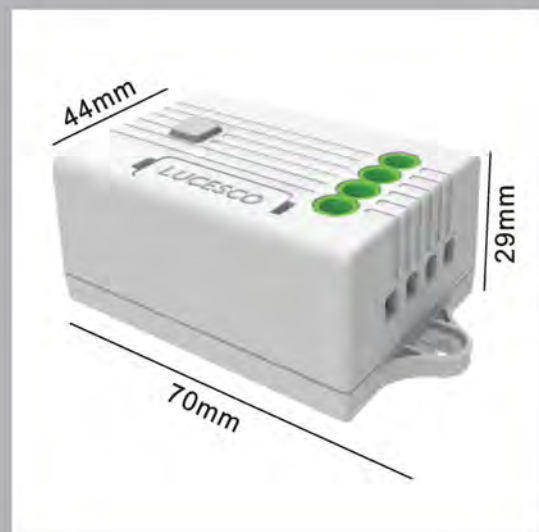



### Quick Facts

Switch Model	LUEE0154
Switch Type	Single gang white switch
Power Supply	Self-powered no battery no power support
Working FSK RF	RF standard 433MHz
Panel Keys	1/2
Working Life	200000 times
Dimension	L86*W86*H16mm
Weight	85g--110g
IP Rating	20
Remote Control	30m (indoor) 80m (outdoor)
Features	Cableless, no wiring
Warranty	2 years

### Option



Model : LUEE0254  
Panel Color : white  
Frame Color : white  
**2 key**

